

# TIMER

DHC9A

TWIN TIMER

DHC9A

## CHARACTERISTICS


### Time ranges:

0.1 s	0.1s~99.9s
s	1s~999s
0.1m	0.1m~99.9m
m	1m~999m
0.1 h	0.1 h~99.9h
h	1 h~999 h


- Supply voltage: AC/DC 100~240V
- Accuracy: 0.1%+0.05s
- Ambient temperature: -10°C to 55°C
- Power consumption: ≤3VA
- Control output: AC 250V 3A
- Contact: 1c
- Panel cutout: 68×68 mm
- Weight: 0.3kg

## OPERATION MODE


### Repetitional operation (k1-off/ k2-on is E mode)

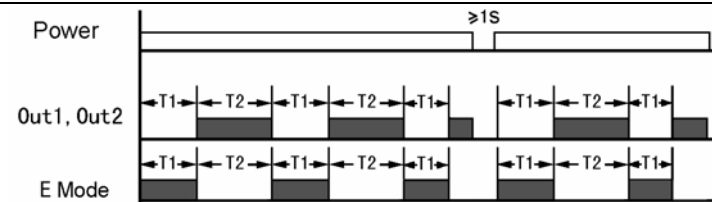

### One time operation (K1-on)

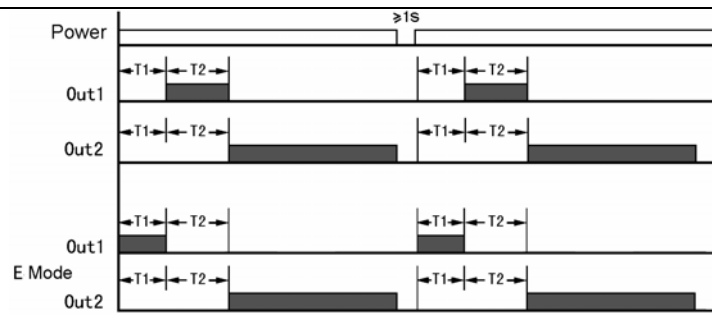

## DIMENSIONS

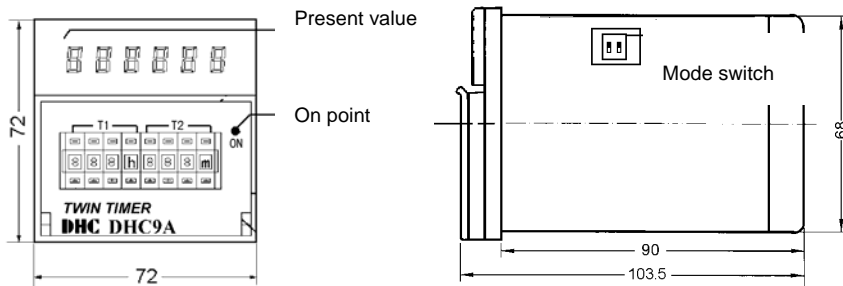

## CONNECTIONS

